


---



---

**TOWARD INDONESIAN TSUNAMI EARLY WARNING SYSTEM  
BY USING RAPID RUPTURE DURATIONS CALCULATION**
**Madlazim**

Physics Department, Faculty of Mathematics and Sciences, Surabaya State University  
(UNESA) Jl. Ketintang, Surabaya 60231, Indonesia.

e-mail: [m\\_lazim@physics.its.ac.id](mailto:m_lazim@physics.its.ac.id)

**ABSTRACT**

Indonesia has an Indonesian Tsunami Early Warning System (Ina-TEWS) since 2008. The Ina-TEWS has used automatic processing on hypocenter;  $M_{wp}$ ,  $M_w$  (mB) and  $M_j$ . If earthquake occurred in Ocean, depth  $< 70$  km and magnitude  $> 7$ , then Ina-TEWS announce early warning that the earthquake can generate tsunami. However, the announcement of the Ina-TEWS is still not accuracy. Purpose of this study is to estimate earthquake rupture duration of large Indonesia earthquakes that occurred in Indian Ocean, Java, Timor Sea, Banda Sea, Arafura Sea and Pacific Ocean using a direct procedure and software developed Lomax and Michelini for rapid assessment of earthquake tsunami potential by deriving two simple measures from vertical component broadband P-wave velocity record. The first is the high-frequency apparent rupture duration,  $T_{dur}$  which may be related to can be related to the critical parameters rupture length ( $L$ ), depth ( $z$ ), and shear modulus ( $\mu$ ). The second is a confirmation of the earlier finding by Lomax and Michelini, namely that the rupture duration has a stronger influence to generate tsunami than  $M_w$  and Depth. We analyzed at least 510 vertical seismogram recorded by GEOFON-IA and IRIS-DMC networks. Our analysis shows that the seismic potency, LWD, which is more obviously related to capability to generate a tsunami than former. The larger  $T_{dur}$  the larger is the seismic potency LWD because  $T_{dur}$  is proportional to  $L/v_r$  (with  $v_r$  – rupture velocity). We also suggest that tsunami potential is not directly related to the faulting type of source and for events that have rupture duration greater than 50 s, the earthquakes generated tsunami. With available real-time seismogram data, rapid calculation, rupture duration discriminant can be completed within 3 to 8 min after the P-onset.

**Key words:** Rupture duration; Tsunami early warning; Body wave; Earthquake dynamics.

## 1. INTRODUCTION

Indonesia is surrounded by the Indo-Australian and Philippine Sea tectonic plates, which subduct beneath the Eurasian plate, with five big islands and several peninsulas. Indonesia has experienced thousands of earthquakes and hundreds of tsunamis over the past four hundred years [1]. Sumatra and Java are two of the most vulnerable islands to tsunami impact since they are located directly in front of the Indo-Australian plate [2,3,4]. Papua, Sulawesi, Sumbawa, Flores and Sumba are other islands that also have been experiencing several earthquake and tsunamis, although not as frequently as Sumatra and Java. Fig. 1 shows the epicenters of earthquakes that have occurred in the region.

The Indonesian islands along the Great Sunda Arc are particularly susceptible to earthquake and tsunami hazards. According to the Harvard Centroid-Moment-Tensor Catalog (<http://www.globalcmt.org>), more than 30 earthquakes with magnitude 7 or greater occurred during the last 30 years along the Sunda subduction zone [5]. The largest event with a magnitude  $M_w=9.3$  was the Sumatra-Andaman earthquake of 26 December 2004 which had a rupture of over 1100 km [6,7,8] and generated a catastrophic, ocean-wide tsunami. Also during the last decades, devastating earthquakes and tsunamis occurred near the islands of Sumba and Sumbawa at the southeastern part of the Sunda subduction zone. The largest were the  $M_w = 8.3$  Sumba earthquake of 1977, the East Java Earthquake ( $M_w = 7.8$ ) of 1994 and the  $M_w = 7.7$  Pangandaran earthquake in 2006 [5]. Most recent was the  $M_w = 7.4$  Metawai earthquake and tsunami of 25 October 2010.

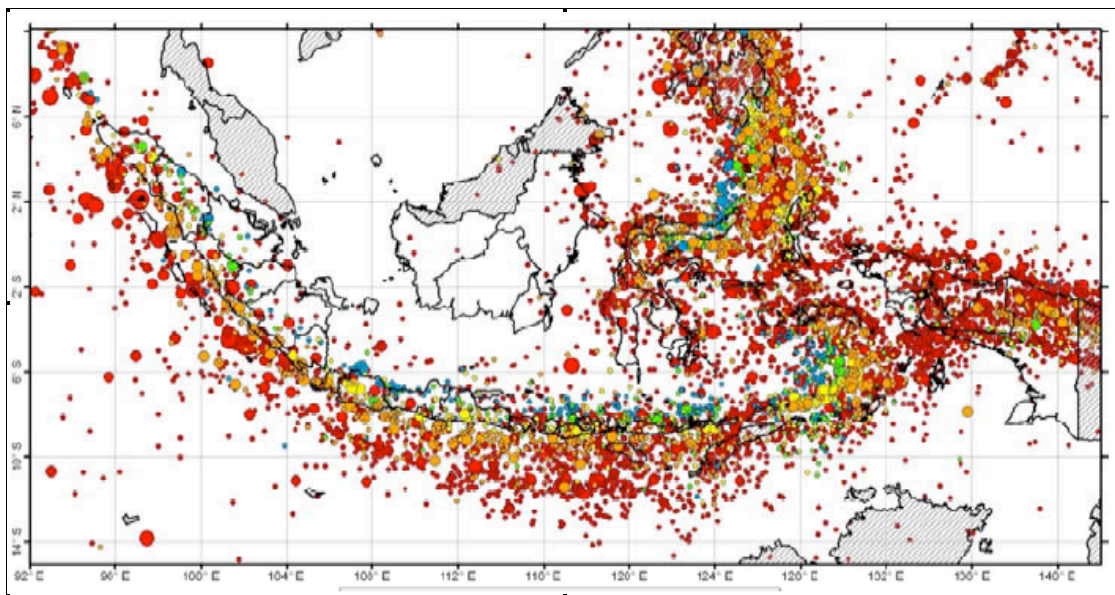


Fig. 1. Epicenters Indonesia earthquake occurred in range 1900 -2009 for magnitude  $> 5$  [9].

The development of Ina-TEWS is being carried out by the Indonesian Government with support of donor countries (Germany, China, Japan, USA, and France) and international organizations (UNESCO, UNDP, UNOCHA, ISDR etc.). Preliminary operation begun in mid-2005 and Ina-TEWS was finally launched in November 2008. Indonesia was characterized as the riskiest country because

of its proximity to tsunami generation regions of the Indian tectonic plate. Thus, the country developed a national system, namely, “The Indonesian Tsunami Early Warning System” (Ina-TEWS). Operational components of Ina-TEWS include monitoring, processing, and telecommunication systems. The monitoring system includes land monitoring of seismic observations (160 broadband seismometers, 500 accelerometers) and GPS observation (40 units), sea surface monitoring with Buoys (22) and 80 tide gauges. BMKG (the Meteorological and Geophysics Agency), is the organization responsible for operating the National Operational Centre, which collects and processes all seismic data, determines earthquake locations, analyzes whether an earthquake is potentially tsunamigenic, issues earthquake information and tsunami warnings and integrates other observation data for confirmation or subsequent cancellation of the warning [8].

Ina-TEWS integrates all monitoring information coming from seismic, GPS, buoy and tide gauges, as well as the modeling system - taken from the tsunami database and geospatial data. The system provides recommendations to the officer-on-duty when the level of warning warrants it and the time that such warning should be issued. Currently, the decision on whether an event is tsunamigenic is based on earthquake parameters such as magnitude, location and depth. Sometimes, the decision requires support from various detailed information sources, tsunami modeling and related data in the DSS system. DSS consists of information retrieval system. Additionally received data and information become a decision bonus, which is shared in the dissemination network. Overview of all the information on data and maps give assistance to the operator in selecting the kind of information that should be disseminated for a certain area [10]. The decision can be wrong if the earthquake parameters are not accurate.

Failures in warning for tsunamis have occurred in Indonesia because earthquake parameters - such as magnitude, location and depth estimates of the Ina-TEWS - were not accurate. For example, BMKG announced that the Mentawai earthquake of October 25, 2010 presented no tsunami threat and cancelled the warning about one hour after the earthquake’s origin time when, in fact, a tsunami had been generated. This Mentawai tsunami left 270 people with significant injuries and 142 with minor injuries. Also, there was considerable damage on the Mentawai Islands, where 6 out of 27 coastal villages that were destroyed and 517 homes were either ruined or carried away by the tsunami.

The present study provides an analysis of seismic data of large Indonesian earthquakes as recorded by the vertical components of seismographs, for the purpose of providing a more accurate, rapid and direct procedure in assessing tsunami potential by estimating a quake’s rupture duration (T<sub>dur</sub>). Additionally, the study analyzes the relation of rupture duration versus the centroid moment tensor magnitude (M<sub>w</sub>) and the earthquakes’ focal depth.

## **2. DATA AND METHOD**

Analysis was performed on at least 510 seismograms of fifty-one events which had epicenters in the Indian Ocean, Java, Timor Sea, Banda Sea, Arafura Sea and the Pacific Ocean, which satisfied the following criteria: (1) had faulting geometry with thrust, strike-slip or normal (2) had moment magnitude (M<sub>w</sub>) between 6.7 and 9.0, and (3) had availability of at least ten high-quality teleseismic digital P-wave recordings with good azimuthal coverage and high signal to noise ratio for each event. Rupture duration was obtained for each event by using data of 10 vertical broadband teleseismic [11,12,13], P-wave data (2° – 30°). We used a direct procedure [11,12,13] to

estimate quake rupture duration. The procedure was used to assess tsunami potential by estimating rupture duration ( $T_{dur}$ ) with a measure of delay time of 90% rms amplitude  $T_{0.9}$ , delay time of 80% rms amplitude  $T_{0.8}$ , delay time of 50% rms amplitude  $T_{0.5}$  and delay time of 20% rms amplitude  $T_{0.2}$ . These parameters are simple to measure on observed P-wave seismograms and can be correlated to critical parameters of rupture length ( $L$ ), width ( $W$ ), slip ( $D$ ) and focal depth - also needed for assessing tsunami potential. This direct, period-duration procedure gives improved identification of recent earthquakes which produced large or destructive tsunamis, relative to the use of Moment Magnitude ( $M_w$ )[14].



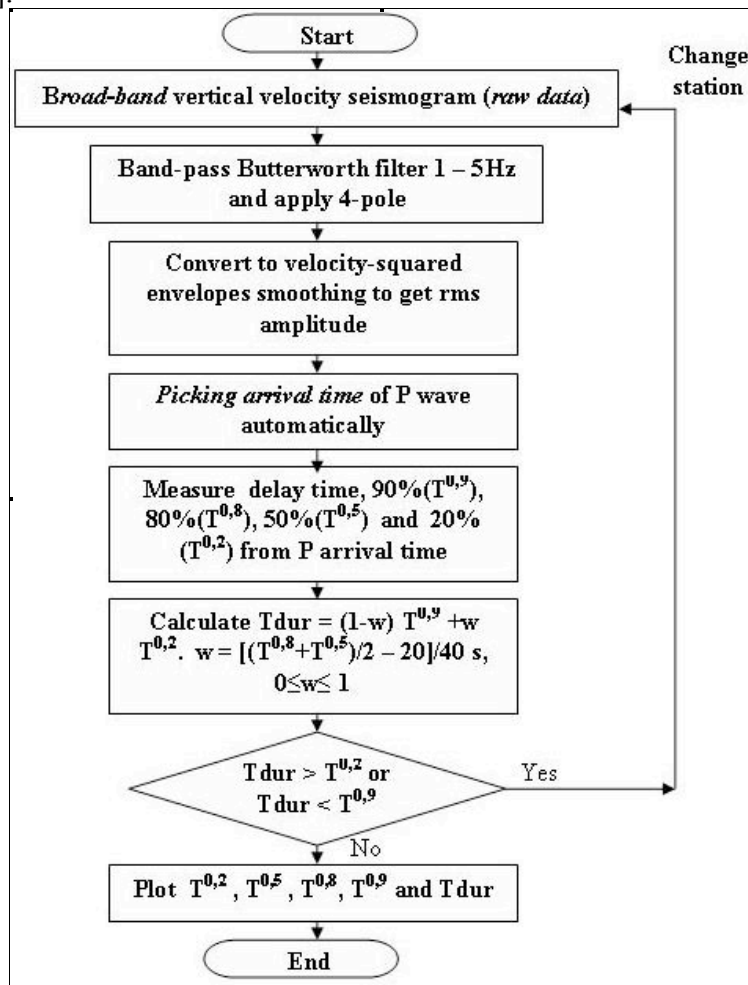


Fig. 2. Direct procedure to calculate rupture duration

For each event the vertical seismograms recorded by stations of the GEOFON-IA and IRIS-DMC networks were used, at different distances and azimuths and then calculated the average rupture duration to get a better estimate. As discriminants for tsunami potential, we first consider the rupture duration, “ $T_{dur}$ ” calculated from the envelope decay of squared, high-frequency, HF; 1–5 Hz bandpass [14,15] of P-wave seismograms at teleseismic distance [11,12,13]. Fig. 2 is a flow chart which outlines the procedure. An example of the analysis of rupture duration processing is illustrated by Fig. 3.

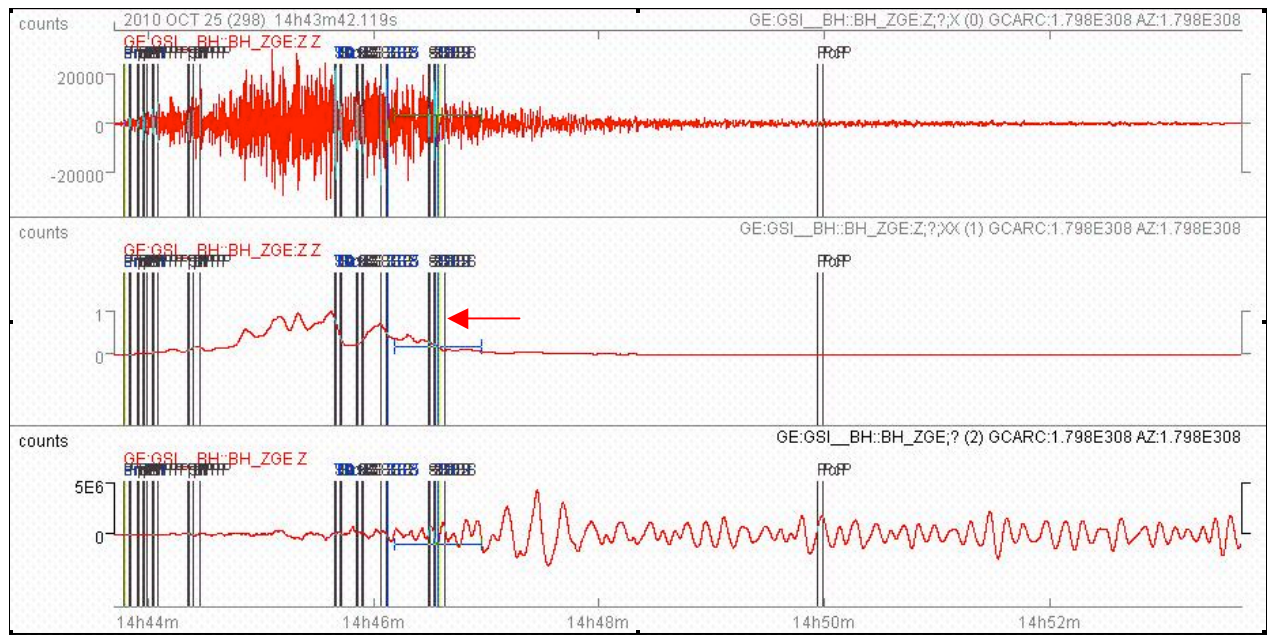

Top

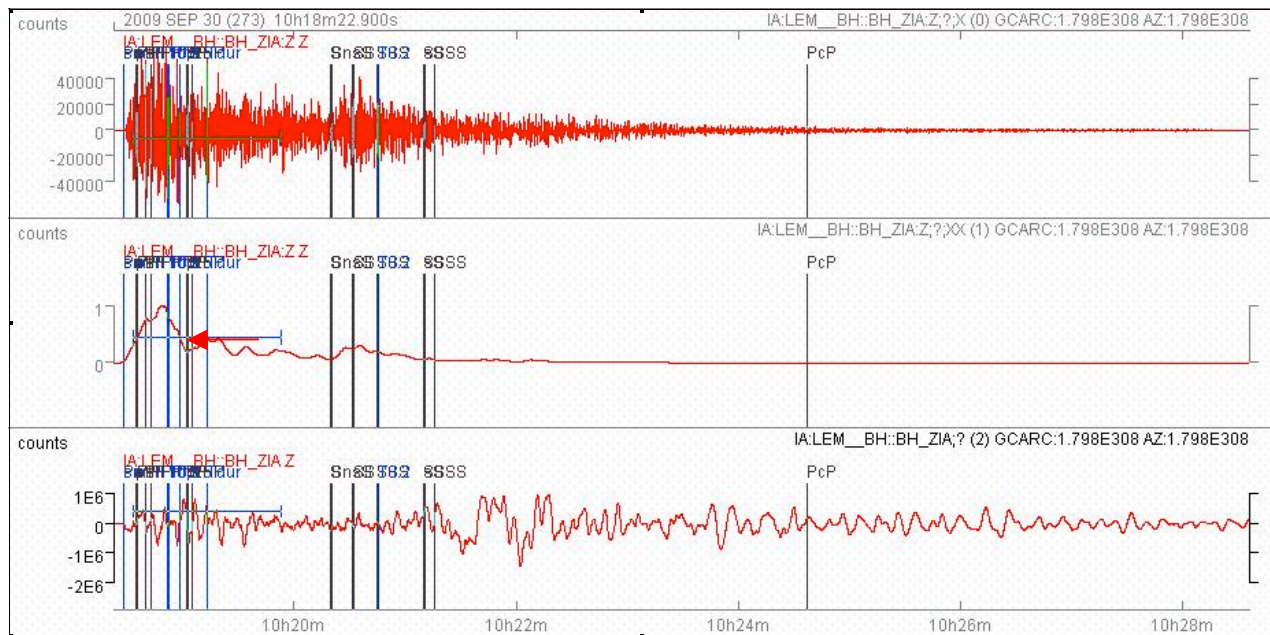

Bottom

Fig. 3. Single-station, period-duration processing examples for (Top) 2010 October 25,  $M_w$  7.8,  $T_{dur} = 119$  s, Mentawai, Indonesia tsunami earthquake, station GE.GSI at  $5.366^\circ$ , and (Bottom) period-duration processing examples for September 30, 2009, Padang non-tsunami earthquake ( $M_w$  7.6,  $T_{dur} = 25$  s, station IA.LEM at  $9.433^\circ$ , Butterworth-filtered HF seismogram (trace 0), smoothed, velocity squared envelope (trace 1) showing raw, broadband velocity seismogram (trace 2). Automatic P pick;  $T_{0,9}$ ,  $T_{0,8}$ ,  $5T_{0,5}$  and  $T_{0,2}$  are delay time from P arrival time; “ $T_{dur}$ ” is rupture duration (red arrow).

### 3. RESULTS AND DISCUSSION

In order to analyze the relationship between rupture duration, centroid moment tensor magnitude ( $M_w$ ) and focal depth, rupture durations were estimated by using data provided by the Global CMT catalogue (<http://www.globalcmt.org>) on moment magnitudes and focal depths. Based on the analysis, it became clear that rupture duration increases when the centroid moment tensor magnitude also increases (Fig. 4a). Thus, the results of the present study were in good agreement with those of Bilek and Lay (1999). Figures 4a and 4b illustrate that for earthquakes that have moment magnitude ( $M_w$ ) greater than 7 and focal depth less than 70 km, no tsunami is generated if the rupture duration is less than 50 seconds. Table 1 provides estimates of rupture duration for large earthquakes occurring in the Indonesian region. Also, table 1 illustrates that tsunami potentials do not only depend on earthquake magnitude and focal depth. All of the earthquakes occurring in the ocean with magnitudes  $M_w > 7$  and depths  $< 70$  km (Ina-TEWS' criteria), did not generate tsunamis. As shown by Table 1, centroid moment tensor magnitude ( $M_w$ ) is found to be a good discriminant for many, past, tsunamigenic earthquakes, but not for all. It was determined that rupture durations have effects which are greater than those of other discriminants ( $M_w$ , focal depth and type of faulting). Most of the earthquakes that generated tsunamis have rupture duration greater than 50 seconds. These results are also in agreement with those obtained by other studies (Okal, 1988)[16]; Geist and Yoshioka 1996)[17] and Lomax and Michelini, 2011). There is a higher probability of tsunami generation when the earthquake rupture duration ( $T_{dur}$ ) is longer and the rupture length is greater. Also, the rupture duration gives more information on tsunami impact,  $M_0/\mu$ , depth and size than  $M_w$  and other currently used discriminants. Figure 4a and 4b illustrate more information of the effect of rupture duration on tsunami generation. The longer the rupture duration, the shallower is the source of the earthquake. For rupture durations greater than 50 seconds, focal depth less than 50 km, and moment magnitudes  $M_w > 7$ , the rupture length is longer, because " $T_{dur}$ " is proportional to  $L$  and greater  $M_0/\mu$ , which is also proportional to  $L$ . So, with rupture duration information more can be known of the four parameters.

The local earthquake of January 1, 1996 represents an anomaly, since the rupture duration was 33 seconds (Table 1 on shadow row), yet it generated a local tsunami [4,18]. This anomalous phenomenon explains the issuance of false warnings from greater events with short duration but which have a high-frequency P signal. The 1996 event may have been one of those associated with fast ruptures, higher than normal stress drop, shorter length ( $L$ ), but larger  $D$ .

Table 1. Assessment of tsunami potential in Indonesia using rupture duration estimation

Global CMT Catalog							Author	NGDC /TL/BMKG			
Origin Time	Lat. (°)	Long. (°)	Depth (km)	M <sub>w</sub>	Fault type	Region	T <sub>dur</sub> (s)	H <sub>max</sub> (m)	NR	TP	
19910704 1143150	-8.02	124.73	17	6.7	Tr	Flores	19			nT	
19921212 0529499	-8.34	122.49	20	7.7	Tr	Flores	78	26.20	26	T	
19921220 2053006	-6.60	130.52	70	7.2	OT	Banda sea	39			nT	
19940215 1707517	-5.15	104.27	16	6.8	SS	S Sumatra	21			nT	
19940602 1817340	-11.03	113.04	15	7.7	Tr	Banyuwangi	130	13.90	24	T	
19941008 2144135	-1.19	127.87	15	6.8	SS	Halmahera	13			nT	
19950127 2016521	-4.43	134.45	22	6.8	N	Papua	36	NA	1	nT	
19950213 1504304	-1.31	127.57	15	6.7	SS	Halmahera	11			nT	
19950319 2353218	-4.18	135.10	19	6.8	SS	Papua	21			nT	
19950514 1133286	-8.60	125.26	16	6.9	N	Flores	53	4.00	1	T	
19951108 0714260	2.00	94.77	29	6.9	Tr	N Sumatra	21			nT	
19960101 0805100	0.74	119.93	15	7.9	Tr	Sulawesi	33	3.43	16	T	
19960217 0559305	-0.89	136.95	33	8.2	Tr	Papua	114	7.68	162	T	
19981109 0538486	-6.94	128.95	25	7.0	Tr	Banda sea	37			nT	
19981129 1410451	-2.03	125.00	16	7.7	SS	Ceram sea	55	2.70	1	T	
20000504 0421334	-1.29	123.59	19	7.5	SS	Sulawesi	96	5.00	1	T	
20000604 1628465	-4.73	101.94	43	7.9	Tr	Bengkulu	43			nT	
20001025 0932321	-7.28	105.43	46	6.8	Tr	Sunda Strait	17			nT	
20010116 1325143	-4.38	101.42	20	6.8	Tr	S Sumatra	23			nT	
20010213 1928451	-5.40	102.36	21	7.3	Tr	S Sumatra	28			nT	
20021010 1050419	-1.79	134.30	15	7.5	SS	Papua	134	3.00	1	T	
20021102 0126259	2.65	95.99	23	7.2	Tr	N Sumatra	33			nT	
20030526 1923385	2.61	128.88	34	6.9	Tr	Halmahera	15			nT	
20040128 2215340	-3.11	127.30	17	6.6	OS	Seram sea	13			nT	
20040205 2105128	-3.62	135.53	13	7.0	OS	Papua	36			nT	
20040207 0242437	-4.03	134.78	12	7.3	SS	Papua	68	NA	NA	T	
20040725 1435254	-2.68	104.38	600	7.3	N	S Sumatra	8			nT	
20041111 2126580	-7.87	125.12	17	7.5	Tr	Alor sea	76	2.00	NA	T	
20041226 0101900	3.09	94.26	29	9.0	Tr	Aceh	460	50.90	999	T	
20050302 1042169	-6.54	129.99	196	7.1	OS	Banda sea	9			nT	
20050328 1610315	1.67	97.07	26	8.6	Tr	Nias	112	3.00	17	T	
20050410 1029178	-1.68	99.54	12	6.7	Tr	Nias	37	0.40	1	nT	
20050514 0505246	0.42	98.24	39	6.7	Tr	Nias	21			nT	
20050519 015525	1.88	96.74	12	6.8	Tr	Nias	13			nT	
20050705 015263	1.56	96.93	16	6.6	Tr	Nias	29			nT	
20060127 165948	-5.61	128.20	397	7.6	N	Banda sea	8			nT	
20060314 0657375	-3.35	127.31	13	6.7	N	Seram sea	117			T	
20060516 1528312	0.01	96.98	14	6.8	N	Nias	12			nT	
20060717 0819287	-9.25	107.41	34	7.6	Tr	Tasikmalaya	170	10.00	196	T	
20070912 2349037	-2.46	100.13	43	7.9	Tr	S Sumatra	168	NA	NA	T	
20070912 1111156	-3.78	100.99	17	8.5	Tr	S Sumatra	174	5.00	47	T	
20070913 0335369	-2.31	99.39	22	7.0	Tr	S Sumatra	25			nT	
20080220 0808454	2.69	95.98	15	7.3	Tr	Simelue	45			nT	
20080225 0836424	-2.66	99.95	14	7.2	Tr	S Sumatra	37	0.12	1	nT	
20090103 1944090	-0.38	132.83	15	7.7	Tr	Papua	30	NA	NA	nT	
20090526 1923385	2.61	128.88	34	6.9	Tr	Halmahera	36			nT	
20090816 0738286	-1.56	99.45	12	6.7	Tr	S Sumatra	34	0.18	1	nT	
20090902 0755075	-8.12	107.33	53	7.0	Tr	Tasikmalaya	13			nT	
20090930 1016092	-0.79	99.67	78	7.6	Tr	Padang	27	0.27	1	nT	
20100406 2215191	2.07	96.74	18	7.8	Tr	N Sumatra	116	0.44	6	T	
20101025 1442222	-3.71	99.32	12	7.8	Tr	Mentawai	136	7.00	22	T	

T:Tsunami; nT:non-Tsunami; T<sub>dur</sub>: rupture duration; Tr: thrust; SS:strike-slip; N:Normal : OT: oblique] thrust; OS: oblique strike slip faulting; H<sub>max</sub>: [maximum water height](http://www.ngdc.noaa.gov/hazard/); NR: number of runups; NGDC: National Geophysical Data Centre (<http://www.ngdc.noaa.gov/hazard/>); TL, Tsunami Laboratory (<http://tsun.sccc.ru/nh/tsunami.php>); NA:not available data; TP:Tsunami potensial. Definition: tsunami occurred if (1) H<sub>max</sub> ≥ 0,5 m and NR more then one times.

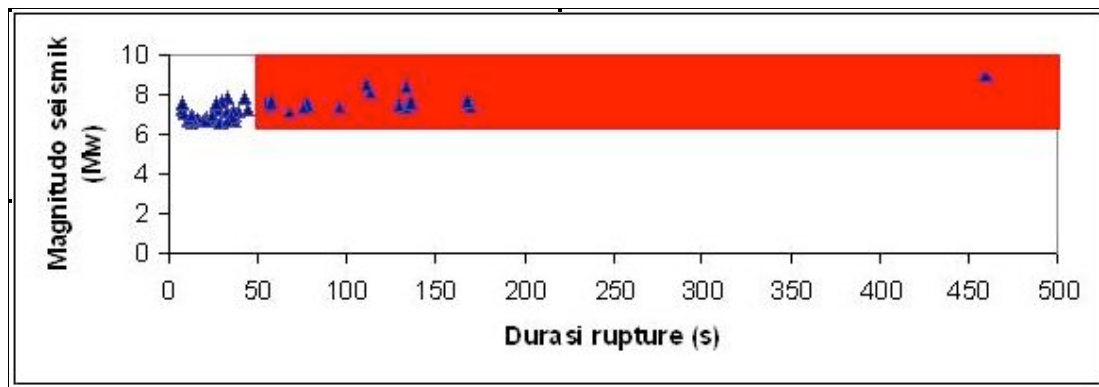


Fig. 4 (a) The relation between magnitude (Mw) and rupture duration, red zone is tsunami potential.

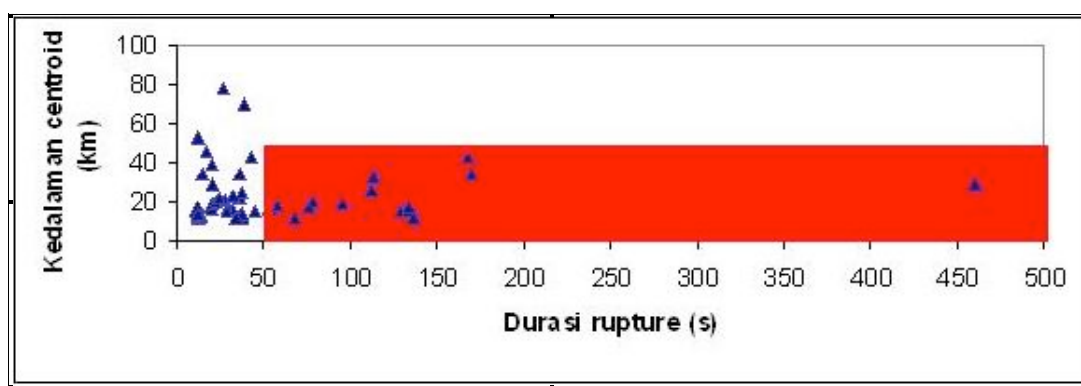


Fig. 4 (b) The relation between source depth and rupture duration, red zone is tsunami potential

Out of 51 earthquakes shown in Table 1 with Mw between 6.7 and 9.0, sixteen (or 31%) had rupture duration,  $T_{dur} > 50$  s, and all sixteen (100%) produced a tsunami. By contrast, from 35 earthquakes with  $T_{dur} < 50$  s only one (or 2.8%) produced a tsunami and 25% of the earthquakes had strike-slip faulting, while 75% earthquakes of the total of 51 have reverse faulting and generated tsunamis. This determination indicates that earthquake rupture duration has a stronger influence in generating tsunami than Mw and focal depth. Many earthquakes have Mw greater and shallower than others, but such earthquakes did not generate tsunamis. For example, the June 4, 2000 earthquake had magnitude ( $M_w = 7.9$ ) greater than that of the February 7, 2004 ( $M_w = 7.3$ ) (Table 1). However, the average rupture duration of the June 4, 2000 earthquake was 43 seconds which was shorter than that of the February 7, 2004, which was 68 seconds. Apparently, the shear modulus of the source of the June 4, 2000 earthquake was greater than that of the February 7, 2004. Therefore, the ratio of seismic moment ( $M_0$ ) to shear modulus,  $\mu$  ( $M_0/\mu = LWD$ ) for the June 4, 2000 earthquake is smaller than the ratio of  $M_0$  to  $\mu$  ( $M_0/\mu$ ) of the February 7, 2004 event. Consequently, the length of rupture caused by June 4, 2000 earthquake was shorter than the rupture length of the February 7, 2004 earthquake. The smaller ratio of  $M_0$  to  $\mu$ , the shorter is the rupture length and the shorter is the rupture duration as well [19]. These results are good agreement with the results of Bilek and Lay (1999) [21] which showed strong trends of decreasing normalized source duration with increasing depth below the sea floor and that the estimated shear modulus of the seismogenic zone increases over depth ranging from 5–50 km.

Of the events that had rupture duration greater than 50 seconds, four events involved strike-slip faulting (Table 1, with darker shadow) and nine involved thrust faulting. All such events generated tsunamis. Based on the analysis, it is suggested that the tsunami potential is not directly related to the faulting mechanism of an earthquake. These results are a good agreement with Lomax and Michelini (2011). Many of the earthquakes have thrust, normal, or strike-slip faulting with rupture duration less than 50 seconds and these events did not generate tsunamis.

Most of the earthquakes indicated a trend of decreasing rupture duration with increasing depth below the seafloor (Fig. 4b). This finding is also in good agreement with the results of Bilek and Lay (1999). All of the events that have rupture duration greater than 50 seconds, had shallow depths ( $\leq 50$  km) and generated tsunamis. However, as previously stated, not all shallow earthquakes generated tsunamis if the rupture duration was less than 50 seconds.

The performance of Ina-TEWS needs to be evaluated against a set of parameters preset by the international community. These parameters are considered crucial in evaluating tsunamigenic earthquakes and in disseminating correctly tsunami advisories to civil defense administrators and the general public – and thus minimize false warnings and unnecessary panic. One of the most critical aspects of a tsunami warning system is to be able to estimate earthquake parameters with reasonable accuracy in the shortest possible time. Earthquake location and magnitude are the two critical parameters to be estimated, so that the right scenario for evaluation can be chosen [21].

As primary discriminants in evaluating tsunami potentials, the Ina-TEWS uses the centroid-moment tensor magnitude  $M_w$ , representing the seismic potency LWD, which is estimated through an indirect, inversion procedure. The estimated  $M_w$  and the implied LWD value vary with the depth of faulting, assumed earth model and other factors and is only available within a period of 30 minutes or more after an earthquake. The use of more direct procedures for hazard assessment, when available, could avoid these problems and help in a more effective early warning (Lomax and Michelini, 2011).

#### 4. CONCLUSIONS

Examination of the rupture duration of large earthquakes occurring in the ocean in the Indonesian region, illustrates the need for rapid and accurate information about the potential of tsunami generation. Analysis of rupture durations for fifty-one events using the direct procedure, determined that of the 51 earthquakes in Table 1 with moment magnitude  $M_w$  between 6.7 and 9.0, sixteen (or 31%) had rupture duration,  $T_{dur} > 50$  seconds and all sixteen generated tsunamis. Of the thirty five of the earthquakes which had rupture duration  $T_{dur} < 50$  seconds, only one (2,8%) generated a tsunami. Only 75% of the fifty-one earthquakes were associated with reverse faulting generated tsunamis. This means that earthquake rupture duration can be used as a discriminant for more accurate and rapid tsunami warning. Earthquakes that have a strike-slip fault type can also generate a tsunami, when the average rupture duration is greater than 50 seconds. The present analysis and results suggest that tsunami potential is not directly related to the faulting mechanism of an earthquake. With available real-time seismographic data, a rapid calculation of the direct, rupture duration discriminant can be completed within 3-8 min after the P wave arrival and thus help in issuing more effective and reliable early tsunami warning. It is recommended that rupture duration should be included as a primary discriminant for Ina-TEWS operations.

## Acknowledgments

The GEOFON and BMKG-IA network (<http://webdc.eu>) and IRIS DMC (<http://ww.iris.edu>) provided access to waveforms used in this study; we thank all those who install, operate and maintain seismic stations worldwide. The Global CMT Catalog (<http://www.globalcmt.org/MTsearch.html>) provided access to CMT data used in this study; we thank all those who install, operate and maintain worldwide. Furthermore, I thank Prof. Anthony Lomax who gave us guidance in understanding the rupture duration calculation and in applying SeisGram2k software to estimate it (<http://alomax.free.fr/software.html>). Our discussions with him were beneficial. I thank Dr. George Pararas-Carayannis for editing certain sections to make what I wrote clearer for reading.

## REFERENCES

1. Aydan, O., 2008. Seismic and tsunami hazard potential in Indonesia with a spatcial emphasis on Sumatra island, Journal of The School of Marine Science ans Technology, Tokai University, 6 (3), 19-38.
2. Madlazim, Bagus Jaya Santosa, Jonathan M. Lees and Widya Utama, 2010. Earthquake Source Parameters at Sumatran Fault Zone: Identification of the Activated Fault Plane, Cent. Eur. J. Geosci.,2(4),2010.DOI:10.2478/v10085-010-0016-5.
3. Madlazim, 2011. CMT, Fault Plane and Rupture Duration for Earthquakes in Sumatra and Possibility of its Implementation for Tsunami Early Warning System, PhD Program of Technology Sepuluh Nopember Institute (ITS) Surabaya. Dissertation.
4. Baeda, A. Y., 2011. Seismic and Tsunami Hazard Potential in Sulawesi Island, Indonesia, Journal of International Development and Cooperation, Vol. 17, No. 1, 2011, pp. 17-30.
5. Brune, S., Babeyko, A.Y., Ladage, S., and Sobolev, S. V., 2010. Landslide tsunami hazard in the Indonesian Sunda Arc, Nat. Hazards Earth Syst. Sci., 10, 589–604.
6. Kruger, F. and Ohrnberger, M., 2005. Tracking the rupture of the Mw 9.3 Sumatra earthquake over 1150 km at teleseismic distance, Nature, 435, 937–939, doi:10.1038/nature03696.
7. Lay, T., Kanamori, H., Ammon, C. J., Nettles, M., Ward, S. N., Aster, R. C., Beck, S. L., Bilek, S. L., Brudzinski, M. R., Butler, R., DeShon, H. R., Ekstrom, G., Satake, K. and Sipkin, S., 2005. The great Sumatra- Andaman earthquake of 26 December 2004, Science, 308, 1127–1133.
8. Ishii, M., Shearer, P. M., Houston, H., and Vidale, J. E., 2005. Extent, duration and speed of the 2004 Sumatra-Andaman earthquake imaged by the Hi-Net array, Nature, 435, 933–936, 2005.
9. Irsyam, M., Sengara, W., Aldiamar, F., Widiyantoro, S., Triyoso, W., Hilman, D., Kertapati, E., Meilano, I., Suhardjono, Asrurifak, M., Ridwan, M., 2010. Ringkasan Hasil Studi Tim Revisi Peta Gempa Indonesia 2010, Bandung.
10. Pribadi, S., 2008. Indonesia Tsunami Early Warning System for Disaster Mitigation,

الندوة الدولية عن إدارة الكوارث

*Science of Tsunami Hazards, Vol. 30, No. 4, page 242 (2011)*

11. Lomax, A., Michelini, A. & Piatanesi, A., 2007. An energy-duration procedure for rapid determination of earthquake magnitude and tsunamigenic potential, *Geophys. J. Int.*, 170, 1195–1209, doi:10.1111/j.1365-246X.2007.03469.x.
12. Lomax, A. & Michelini, A., 2009a. Mwpd: a duration-amplitude procedure for rapid determination of earthquake magnitude and tsunamigenic potential from P waveforms, *Geophys. J. Int.*, 176, 200–214, doi:10.1111/j.1365-246X.2008.03974.x.
13. Lomax, A. & Michelini, A., 2009b. Tsunami early warning using earthquake rupture duration, *Geophys. Res. Lett.*, 36, L09306, doi:10.1029/2009GL037223.
14. Lomax, A. and A. Michelini, 2011. Tsunami early warning using earthquake rupture duration and P-wave dominant period: the importance of length and depth of faulting, *Geophys. J. Int.* 185, 283-291, doi: 10.1111/j.1365-246X.2010.04916.x.
15. Hara, T., 2007. Measurement of the duration of high-frequency energy radiation and its application to determination of the magnitudes of large shallow earthquakes, *Earth Planets Space*, 59, 227–231.
16. Okal, E.A., 1988. Seismic parameters controlling far-field tsunami amplitudes: a review, *Nat. Hazards*, 1, 67–96.
17. Geist, E. and Yoshioka, S., 1996. Source Parameters Controlling the Generation and Propagation of Potential Local Tsunamis, *Natural Hazards* 13: 151-177.
18. Gomez, J.M., Madariaga, R., Walpersdorf, A., and Chalard, E., 2000. The 1996 Earthquakes in Sulawesi, Indonesia, *Bull. Seism. Soc. Am.*, 90, 3, pp. 739–751.
19. Bilek, S. L. and Lay, T., 1999. Rigidity variations with depth along interplate megathrust faults in subduction zones, *NATURE*, Vol. 400, 29 July 1999, www.nature.com.
20. Geist, E.L. & Bilek, S.L., 2001. Effect of depth-dependent shear modulus on tsunami generation along subduction zones, *Geophys. Res. Lett.*, 28, 1315–1318, doi:10.1029/2000GL012385.
21. Nakamura, Y., 1988. On the urgent earthquake detection and alarm system (UrEDAS), in *Proc. of the 9th World Conference on Earthquake Engineering*, Tokyo-Kyoto, Japan.